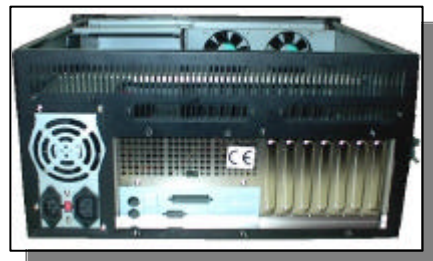


19" Rack-mount 5U LCD Chassis

Specification

- 0.05" SECC heavy-duty steel electroplated for chassis
- Designed by the lockable door of front panel for protecting the system security
- Designed the anti-vibration card clamp to keep the system stable and safety
- Aluminum handles
- Support AT/ATX form mother board or 14-slot backplane
- Display:
 - TFT LCD 12.1"(800x600 or 1027x768)
 - 50000 hours backlight MTBF
 - Analog VGA input
 - Built-in 5 languages OSD function.
 - LCD On/off switch.
- Drive Bays:
 - 1 x 3.5" FDD
 - 1 x 5.25" CD-ROM
 - 1 x 3.5" HDD
- Power supply:
 - PS/2 200W ~ 400W power supply
 - 250W ~ 600W ATX power supply
- Cooling:
 - Built-in two 8cm cooling fans
 - Power supply fan
- One keyboard connector in front panel
- LED Indicator: Power ON/OFF and Reset switches/ LED indicators at front panel
- Speaker: 8 Ohm,0.4W 1.5"
- Chassis Colors: Black and beige color available, OEM color welcome
- Dimension:
 - 483 (W) x 450 (D) x 221 (H) mm
 - N.W.: 15KGS, G.W.: 17KGS, CUFT: 4.1
- Operating Temperature: 0° ~ 50°C (32 ~ 113° F)
- Relative Humidity: 5~85%
- OEM Specification Welcome
- Option:
 - Touch screen
 - Power Supply

**WINGTOP CO.,LTD.**

No. 9, Gong 6th Rd., Linkou Dist., New Taipei City 244, Taiwan (R. O. C.)

TEL: 886 2 2601 9881(8686) FAX: 886 2 2601 3586(8229)

<http://www.wingtop.com.tw> E-mail:sales@wingtop.com.tw