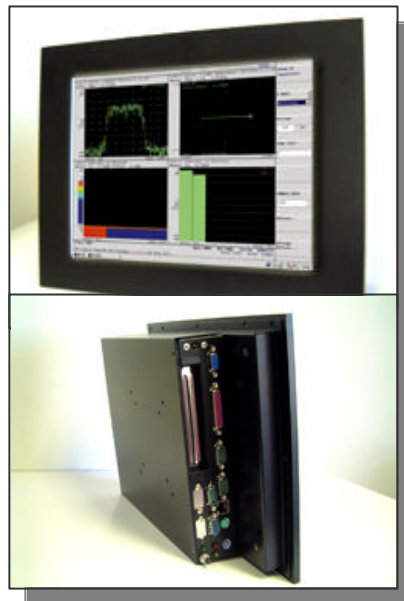


INDUSTRIAL 10.4" Fan less PANEL PC

Specification

- **Designed for industrial Panel PC mountable**
- **Aluminum made front panel meet IP65 (Optional)**
- **Meet VESA standard ARM mounting hold**
- **Fanless design**
- **Processor**
 - Supports VIA C3 376 PIN EBGA type F.S.B. 100/133 MHz
 - VIA Eden series Processor 533/800 speed .
 - Lowest Voltage / Power consumption.
 - Integrated full-speed 192KB L1/L2 cache.
 - 133MHz Front side bus.
 - Advanced multimedia instruction set for MMX, 3Dnow
- **Chipset**
 - VIA PLE133 VT8606 and VT82C686B
- **Memory**
 - Supports PC 133/100 SDRAM DIMM
 - 2x DIMM sockets up to 1GB
- **Panel**
 - 10.4 TFT LCD panel PC
 - Resolution 800x600 for TFT display
 - Luminance: 230 cd/m²
 - Contrast ratio: 500:1
 - MAX COLOR: more than 262,144 colors.
- **Expansion**
 - 1x PISA slot expansion riser card supports for one PCI-2.1 or ISA slot
- **VGA**
 - Integrated Pro Savage 4 2D/3D Video Accelerator
 - Full internal AGP 4X performance
 - Supports 8/16/32Mbyte of frame buffer use system memory
- **Driver bay**
 - 1 x 2.5" HDD
 - 1 x DOC
- **Ethernet**
 - Compliant to PCI-2.2 use Realtek RLT8100B chipset
 - Supports 10Mb/S and 100Mb/s Fast Ethernet
 - Supports Wake On LAN function
 - Supports Full Duplex Flow Control (IEEE 802.X)
- **Sound**
 - AC97 2.1 compliant
 - Dual full-duplex direct sound
- **I/O Specification**
 - 3x serial ports supports RS232 spec.
 - 1x serial port supports RS232/422/485 selectable
 - 4x serial ports w/ selectable Voltage RI/+5V/+12V
 - 2x parallel ports for ECP/EPP/SPP spec
 - 1x DIO port (Digital Input Output) supports 4 Input and 4 Output solution
 - DIO port address 445h (low data input, High data Output)(option)
- **PCI Bus Master IDE**
 - Dual channel master mode PCI support four enhanced IDE devices
 - Support PIO mode to 4 and ATA 33/66/100 IDE device
 - Support ATAPI CD-ROM, LS-120, ZIP
- **Power supply**
 - Dc12v input +5v/+12v/+3.3v/-12v output
- **Power supply adapter**
 - Input voltage 100~240 VAC
 - 12v dc output 60 w
 - Frequency 50~60 Hz
- **Environment Specification**
 - Operating temperature: 0 °C ~50 °C
 - Storage temperature: -20 °C ~60 °C
- **Option**
 - Resistive touch panel
 - TV-out
 - SDRAM
 - HDD
 - DOC (Disk On Chip)
- **Dimensions**
 - W.340mm x H.260mm x D.82mm

**WINGTOP CO.,LTD.**

No. 9, Kong 6Th Rd., 2nd Industry Park, Lin Kou, Taipei Hsien, Taiwan, R. O. C.

TEL: 886 2 2601 9881 (8686)

FAX: 886 2 2601 3586(8229)

<http://www.wingtop.com.tw>

E-mail:sales@wingtop.com.tw

2003/7/4