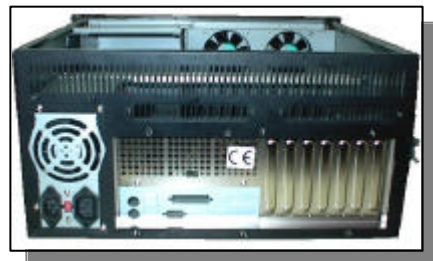


## 19" Rack-mount 5U LCD Chassis

**Specification**

- 0.05" SECC heavy-duty steel electroplated for chassis
- Designed by the lockable door of front panel for protecting the system security
- Designed the anti-vibration card clamp to keep the system stable and safety
- Aluminum handles
- Support AT/ATX form mother board or 14-slot backplane
- Display:
  - TFT LCD 12.1" (SVGA or XGA)
  - Analog VGA input
  - Built-in 8 languages OSD function.
  - LCD On/off switch.
- Drive Bays:
  - 1 x 3.5" FDD
  - 1 x 5.25" CD-ROM
  - 1 x 3.5" HDD
- Power supply:
  - PS/2 250W ~ 400W power supply
  - 250W ~ 600W ATX power supply
- Cooling:
  - Built-in two 8cm cooling fans
  - Power supply fan
- One keyboard connector in front panel
- LED Indicator: Power ON/OFF and Reset switches/ LED indicators at front panel
- Speaker: 8 Ohm,0.4W 1.5"
- Chassis Colors: Black (beige color available), OEM color welcome
- Dimension:
  - 483 (W) x 450 (D) x 221 (H) mm
  - N.W.: 15KGS, G.W.: 17KGS, CUFT: 4.1
- Operating Temperature: 0° ~ 50° C (32 ~ 113° F)
- Relative Humidity: 5~85%
- OEM Specification Welcome
- Option:
  - Touch screen
  - PCI VGA CARD for TFT LCD (C&T 69000 Chip)

**WINGTOP CO.,LTD.**

No. 9, Kong 6Th Rd., 2nd Industry Park, Lin Kou, Taipei Hsien, Taiwan, R. O. C.

TEL: 886 2 2601 9881 ( 8686 )

FAX: 886 2 2601 3586(8229)

<http://www.wingtop.com.tw>

E-mail:sales@wingtop.com.tw

May/29/2003