

---

## ----- Introduction

### Overview

The SH-6580-3 is only 1U Three in one control center (KEYBOARD, LCD and MOUSE). The optional Displays are 15.0". TFT LCD Panel Resolution is 1024 x 768(Analog VGA Input). Touchpad is compatible with PS/2 mouse interface. The keyboard is 105 key ALPS switch English Keyboard (GeSHan, French, Chinese, Japanese ....optional).

### Features

- Supports PS/2 mouse
- Standard 1U 19 inch rack mounting

---

## ----- Installation

### Rack Mount Accessories

Figure 1 shows how to attach mounting brackets to the SH-6580-3 unit for standard 19-inch rack cabinet.

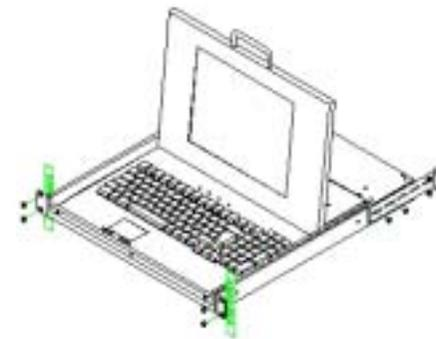
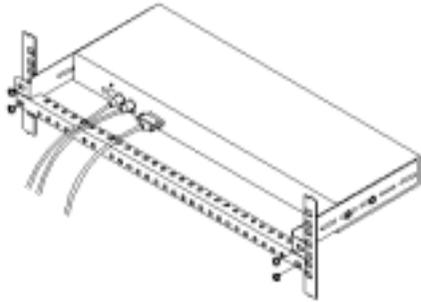


Figure 1: Attaching rack mount bracket

Figure 2 shows how to assemble rack cable support then screw it to the back and inside the rack cabinet vertical post (optional).



*Figure 2: Assembling rack cable support*

Then, keyboard/mouse/monitor cables can be routed over the cable support. You can use plastic cable ties to bundle and label the cables through the rack cable support holes for easy identification.

## ----- *Operation*

### **DISPLAY OSD (On-Screen-Display) Operation**

There are five push buttons "AUTO", "MENU", "+", "-", "LCD-I/O" and one "POWER" LED on the keyboard. When the control center is power on, the LED is bright. When the display is power on, the LED is green. When the display is power off, the LED is red. If you want to adjust the display, first press "MENU" button. Use "+" or "-" selecting which function you want. Then press "MENU" to work out. If you press the button "AUTO", the display will work out for AUTO configure.

When you put down the display, the display is off after 3~5Second. Oppositely the display is on after 3~5 Second. If the display is on, it will be off when you press the "LCD-I/O" after 3~5 Second. Oppositely the display will be on 3~5 Second.

## DISPLAY OSD (On-Screen-Display) MENU

FIRST LEVEL	SECOND LEVEL	THIRD LEVEL
AUTO TUNE.		
BRIGHTNESS		
CONTRAST		
COLOR	9300 7500 6580-3 USER	RED GREEN BLUE RETURN
	RETURN	
QUALITY	SIZE PHASE NOISE TEXT/ GFX	TEXT GFX RETURN
	RETURN	
POSITION	IMAGE POS.	HORIZONTAL VERTICAL CENTRE RETURN
	OSD POS.	HORIZONTAL VERTICAL CENTRE RETURN
	RETURN	
LANGUAGE	ENGLISH GESHAN FRENCH ITALIAN SPANLISH	
RECALL	YES NO	
SAVE		
CANCEL		

## Touch Pad

There are two function buttons on the Touch Pad (function similar with mouse).

You can touch the Touch Pad twice continually instead of using "enter" button.

If you want to pull something, you can touch the Touch Pad twice continually. But your hand can't leave the Touch Pad at the second time. You have to touch the Touch Pad and move your finger until you pull something to the place that you want.

## Limited Warranty

IN NO EVENT SHALL THE DIRECT VENDOR'S LIABILITY FOR DIRECT OR INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES, LOSS OF PROFIT, LOSS OF BUSINESS, OR FINANCIAL LOSS WHICH MAY BE CAUSED BY THE USE OF THE PRODUCT EXCEEDS THE PRICE PAID FOR THE PRODUCT.

The direct vendor makes no warranty or representation, expressed or implied with respect to the contents or use of this documentation, and especially disclaims its quality, performance, merchantability, or fitness for any particular purpose.

The direct vendor also reserves the right to revise or update the product or documentation without obligation to notify any user of such revisions or updates. For further information, please contact your direct vendor.

All the brand names and registered trademarks are the property of their respective owners.